

OZONE ANALYZER **BMT 965 C**

*Cabinet Version of
High Concentration
Ozone Gas Analyzer*



FEATURES

- Dual beam UV photometer
- Long-life mercury lamp
- Warranty 3 years, 5 years on the UV lamp
- High accuracy, error less than 0.5 %
- Pressure and temperature compensated
- 9 measurement ranges available: from 10 to 600 g/Nm³
- Two-stage particle filter, integrated
- Build-in Purge Unit and timer for automatic zeroing
- Failure warnings include: lamp low, cuvette dirty, overrange, summary error
- Key functions programmable via the front panel, or a Windows PC
- Display in g/Nm³, %wt/wt, %wt(air) or ppm,
- High and low limit alarms
- 4 - 20 mA and 0 - 10 V isolated outputs
- 8 GB non-volatile log memory (binary and Excel CSV)
- USB On-The-Go, Firmware upgrades in the field

APPLICATIONS

- Ozone measurement in hostile environment
- Monitoring of ozone generator output
- Monitoring of residual ozone after a process
- Potable water & waste water treatment
- Industrial ozone processes
- Ballast water treatment

The OZONE ANALYZER BMT 965 C is the wall-mount version of the standard BMT 965 ST for application in a hostile environment. It is housed in a splash-proof IP 65 (NEMA 4X) aluminum cabinet, and is equipped with everything needed for fully automatic stand-alone operation.

The instrument comes with a Sample Gas Filter (two-stage particle filter), throttle valve, flow meter, Purge Unit (solenoid valve and air pump, for fully automatic zeroing), and a Catalyzing Cartridge.

The two-stage particle filter is a stainless steel housing containing two different filter inserts: one pre-filter (OD 25 mm, 1 mm thick) and one ultra fine main filter (OD 25 mm, 6 mm thick). Both filter inserts are made of porous PTFE.


An eight gigabyte non-volatile log memory is included, providing virtually unlimited storage capacity for concentration and error logs. If connected to a PC, the instrument acts as an external USB drive, from which concentration and error logs can be downloaded. Logs can also be copied and firmware can be upgraded without an external computer just by connecting a USB flash drive.

Complete control of all operating parameters is provided with the Windows software BMT 965 Link.

Superior stability of the photometer is achieved by use of a true dual beam optical system with an extremely long-life mercury lamp. MTBF of the instrument, including the lamp, is in excess of 65,000 h. Excluding the lamp it is 120,000 hours.

SPECIFICATIONS

measurement principle	dual-beam UV photometer (254 nm), no moving parts
MTBF	instrument incl. UV lamp 65,000 h, excl. UV lamp 120,000 h
UV lamp	low pressure mercury lamp, long life design, burnt-in for 300 h
display	16-character alphanumeric backlit LCD
concentration ranges	50, 100, 200, 300, 400, 500, 600 g/Nm ³ selectable units: g/Nm ³ , %wt/wt, %wt(air) and ppm,
optional ranges	10, 20 g/Nm ³ selectable units: g/Nm ³ , %wt/wt, %wt(air) and ppm,
accuracy	after zeroing the max. error is the sum: 0.4 % of measurement + 0.1 % of scale
repeatability error	0.2 % of measurement
response time	0.1 s (analog output), 0.3 s (display)
zero drift	typ. 0.2 % of range per day, after warm-up, non-cumulative
max. inlet pressure	2.5 bar g
max. outlet pressure	1.15 bar abs
ambient temperature	0 - 55 °C (non-condensing)
materials in contact with ozone	quartz, stainless steel, FFPM and FEP
inlet gas port	for FEP tubing 3x5 mm (1/8"x3/16"), opt. 4x6 mm, 1/8" or 1/4" or 6 mm Swagelok Built-in sample gas filter is standard
outlet gas port	for FEP tubing 4x6 mm
recommended flow rate	0.1 to 1 l/min typical
pressure drop	approx. 60 mbar at 0.5 l/min, throttle valve fully open
temperature compens.	is standard
pressure compensation	with built-in cuvette pressure transducer units selectable: bar, psi, Torr, MPa
signal outputs	concentration 4 - 20 mA (isolated, active) concentration 0 - 10 V (isolated)
concentration alarms	High Alarm, Low Alarm, latching, not latching
control input	set to zero (24 VDC, 8 mA, isolated)
control outputs	relay contacts 28 V, 0.5 A, isolated: Lamp Low Warning Cuvette Dirty Warning High Alarm Low Alarm
error handling	Error Relay: 30 VDC, 0.5 A, summarizing instrument failures. Lamp Low Error, Lamp Off Error, Lamp High Error, Cuvette Dirty Error, Overrange, Overpressure, Low Pressure, EEPROM Error, SD Card Error
early warnings	Lamp Low Warning, Cuvette Dirty Warning
memory	8 GB for error and concentration logs
USB	On-The-Go, Device/Host mode, Full speed
interface (opt.)	Rs-232, bidirectional, isolated, 2400 - 38400 Baud or MODBUS/TCP or MODBUS RTU
automatic zeroing	with internal purge pump and solenoid valve
software	BMT 965 Link, instrument configuration and readout of Concentration, Event and Error Logs on a Windows PC
power	wide range input: 100 - 240 VAC, 35 VA
dimensions (W x H x D)	300 x 200 x 120 mm
weight	3.6 kg
compliance	CE-marked (EMC & safety), cTUVus NRTL-listed, USCG 46 CFR 162.060-30

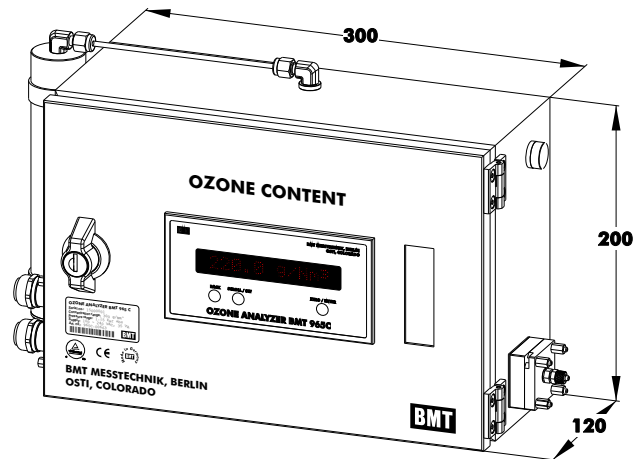

dimensional outline

The OZONE ANALYZER BMT 965 C is housed in a powder-coated aluminum cabinet. The space needed (door open, sample gas tubing and cables connected) is approx. 480 x 240 x 420 mm (W x H x D). The cabinet can be wall mounted using the four brackets provided at the rear (four mounting holes 6 mm ID, spaced 240 x 225 mm, W x H).

The ozone sample gas is connected to the Sample Gas Filter (two-stage particle filter) provided outside of the cabinet (see sketch above). We recommend to use transparent FEP sample gas tubing 3x5 mm (or 1/8"x3/16" respectively). The standard inlet fittings thus are for 3x5 mm flexible tubing. But different other fittings are available on request: for 4x6 mm flexible tubing, or Swagelok fittings 1/8" or 6 mm or 1/4".

Additional BMT Products (for details, refer to the appropriate data sheets):

- BMT 965 BT (Bench Top) for stand-alone applications on the bench, or in the field
- BMT 965 AQ for ozone measurement in pure water (UPW or DI water)
- BMT 965 AQ/HF for ozone measurement in pure water (UPW or DI water) with HF
- BMT 932 Ozone Monitor for TLV monitoring in ambient air (1, 3 & 6 channels)

A broad spectrum of field-proven accessories - from simple fittings and tubing up to a thermoelectric sample gas dryer - helps the user with the application and installation of the OZONE ANALYZER BMT 965 C.

Please ask for our assistance!